



*Personal Computer  
Hardware Reference  
Library*

---

# **IBM Slimline Diskette Drive**

6361484

IBM Slimline Diskette Drive



# Contents


Description .....	1
Specifications .....	5
Logic Diagrams .....	7



# Description

The IBM Portable Personal Computer has space and power for one or two 5-1/4 inch slimline diskette drives. Each drive can use single-sided or double-sided diskettes with 40 tracks on each side. The drive is completely self contained, and consists of a spindle drive system, a head positioning system, and a read/write/erase system.

The recording medium is a flexible magnetic disk enclosed in a protective jacket. The protected disk, free to rotate within the jacket, is continuously cleaned by the soft fabric lining of the jacket during normal operation. Read/write/erase head access is made through an opening in the jacket. Openings for the drive hub and diskette index hole are also provided. The following figure is a simplified drawing of the diskette used with the IBM 5-1/4 Diskette Drive.

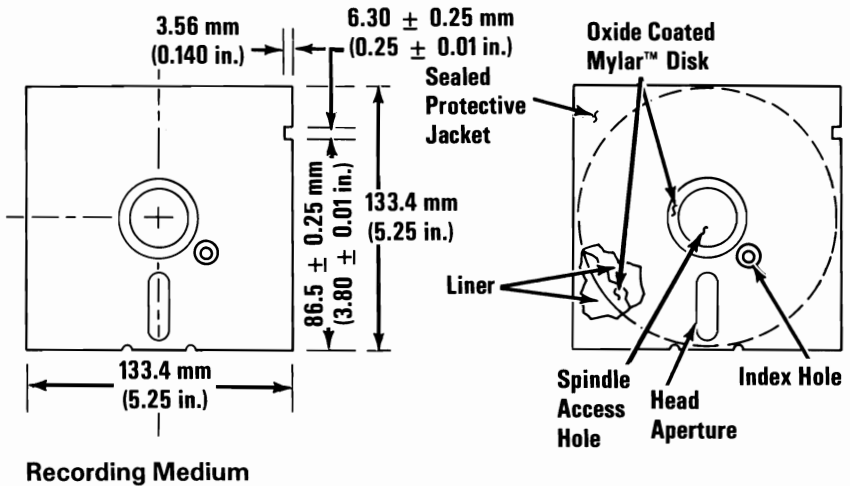

To load a diskette, the operator twists the latch at the front of the diskette drive counter-clockwise and inserts the diskette into the slot. Plastic guides in the slot ensure the diskette is in the correct position. Twisting the latch clockwise centers the diskette and clamps it to the drive hub. After 250 milliseconds, the servo-controlled dc motor starts and drives the hub at a constant speed of 300 rpm.

The diskette drive uses modified frequency modulation (MFM) to read and write digital data with a track to track access time of 6 milliseconds. It reaches operating speed in 0.5 seconds and drives the hub at a constant 300 rpm.

The head positioning system, which consists of a 4-phase stepper-motor and band assembly with its associated electronics, moves the magnetic head so it comes in contact with the desired track of the diskette. The stepper-motor and band assembly uses one-step rotation to cause a one-track linear movement of the magnetic head. No operator intervention is required during normal operation. During a write operation, a 0.33 millimeter (0.013-inch) data track is recorded, then tunnel-erased to 0.30 millimeter (0.012 inch). If the diskette is write-protected, a write-protect sensor disables the drives circuitry, and an appropriate signal is sent to the interface.

Data is read from the diskette by the data-recovery circuitry, which consists of a low-level read amplifier, differentiator, zero-crossing detector, and digitizing circuits. All data decoding is done by the adapter card.

The diskette drive also has the following sensor systems:

- The track 00 switch, which senses when the head/carriage assembly is at track 00.
- The index sensor, which consists of a light emitting diode (LED) light source and phototransistor. This sensor is positioned so that a digital signal is generated when the index hole is detected.
- The write-protect sensor disables the diskette-drive write circuits whenever the diskette has a write-protect tab.

For interface information and programming considerations, refer to “IBM 5-1/4" Diskette Drive Adapter” in this manual.





# Specifications

<b>Size (maximum)</b>	
Height	42 mm (1.6 in.)
Width	146 mm (5.8 in.)
Depth	203 mm (8.0 in.)
<b>Weight</b>	1.1 kg (2.4 lb)
<b>Power</b>	+12 Vdc $\pm 5\%$ +5 Vdc $\pm 5\%$
<b>Media</b>	Industry-compatible 5-1/4 inch diskette
<b>Tracks per Inch</b>	48
<b>Number of Tracks</b>	40
<b>Temperature (exclusive of media)</b>	
Operating	10 to 50°C (41 to 122°F)
Non-operating	-40 to 60°C (-40 to 140°F)
<b>Relative humidity (exclusive of media)</b>	
Operating	20 to 80% (non-condensing)
Non-operating	5 to 95% (non-condensing)
<b>Seek Time</b>	6 ms track-to-track
<b>Head Settling Time</b>	21 ms (from last step pulse)
<b>Error Rate</b>	
Recoverable	1 per 10 <sup>9</sup> bits read
Irrecoverable	1 per 10 <sup>12</sup> bits read
Seek Errors	1 per 10 <sup>6</sup> seeks
<b>Head Life</b>	20,000 hours (normal use)
<b>Media Life</b>	3.0 X 10 <sup>6</sup> passes per track
<b>Disk speed</b>	
Long Term	300 rpm $\pm 1.5\%$
Instantaneous	300 rpm $\pm 3.0\%$
<b>Start Time</b>	500 ms (maximum)
<b>Transfer Rate</b>	250K bits/sec
<b>Recording Mode</b>	MFM


## Mechanical and Electrical Specifications



# Logic Diagrams


The following pages contain the logic diagrams for the IBM Slimline Diskette Drive.



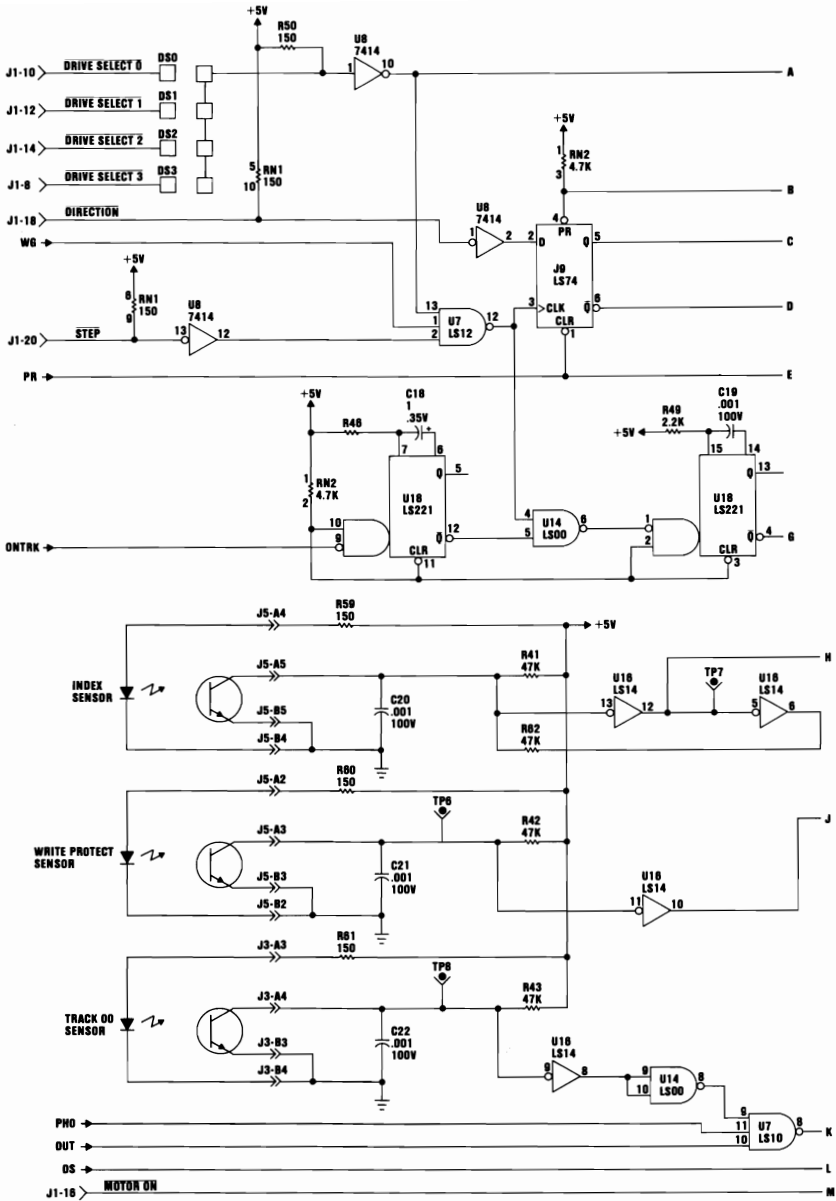


Slimline Diskette Drive (Sheet 1 of 4)

## 8 Slimline Diskette Drive

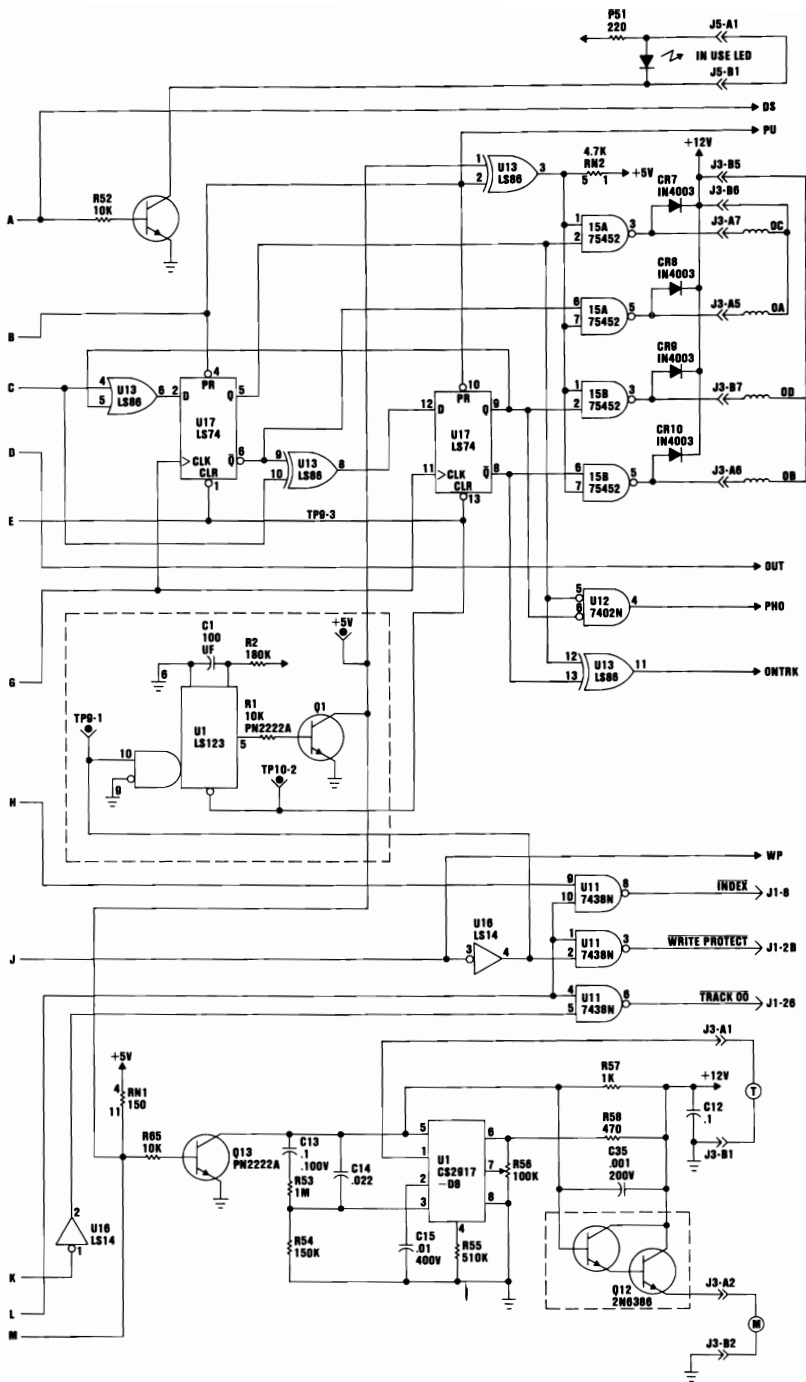


Slimline Diskette Drive (Sheet 2 of 4)

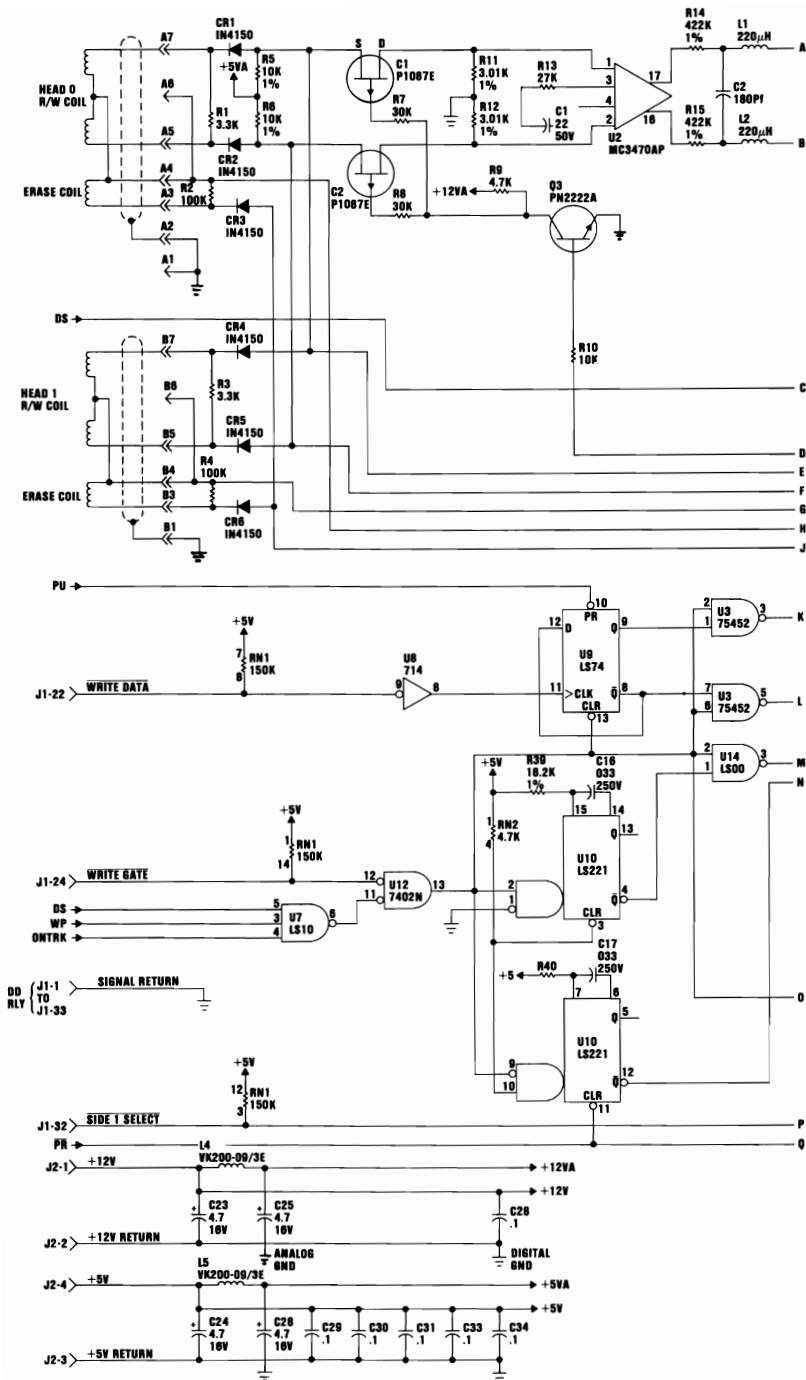

Slimline Diskette Drive (Sheet 3 of 4)

## 10 Slimline Diskette Drive

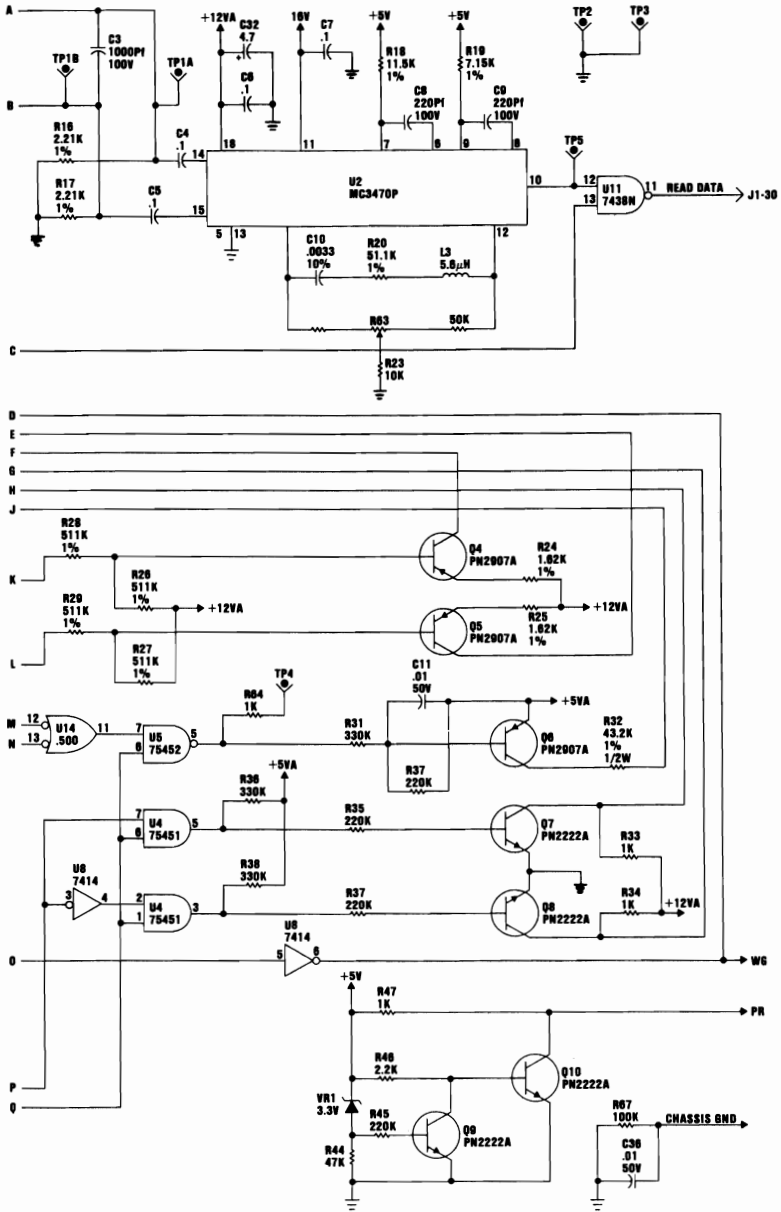

Slimline Diskette Drive (Sheet 4 of 4)

# Notes:

